

Classical Doors

Timber Doors & Windows



CLASSICAL DOORS LTD



| Registered Master Joiner

| www.classicaldoors.co.nz








Entrance Phoenix Doors

Contemporary doors to compliment the simple, clean lines of a modern home. These doors are suitable for a well-sheltered location.





Features

- Sturdy, fully glued and filleted joints with concealed steel stiffeners.
- Select from aluminium, stainless steel, brass or copper metal features.
- Try our unique riverstone panel.
- Negative detail or V-groove.
- Hardwood clashing strips.

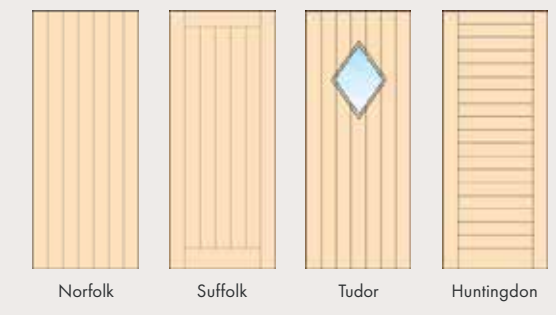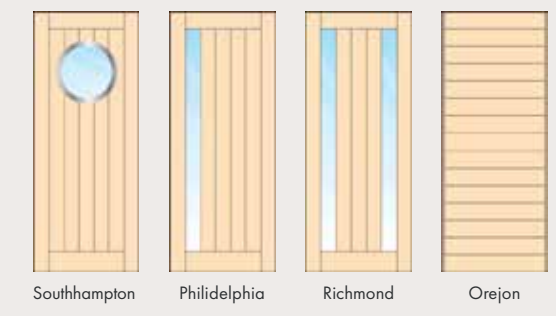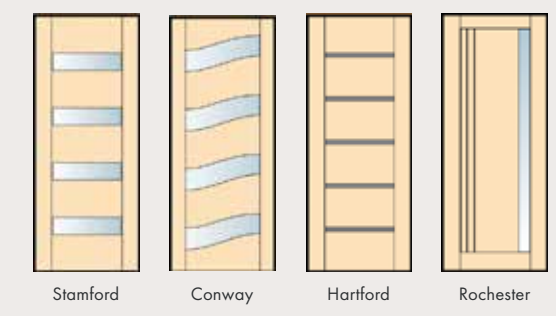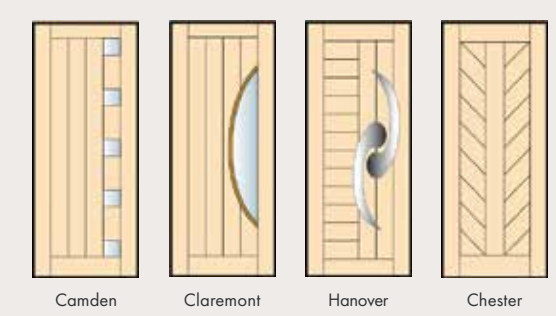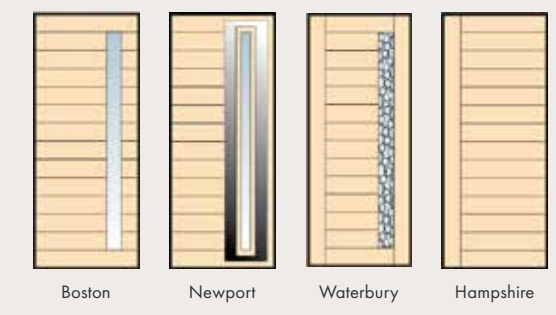

Entrance Classical Doors

Classical entrance doors are designed for well-sheltered situations only and a complete seal against moisture must be maintained to keep your door in pristine condition.

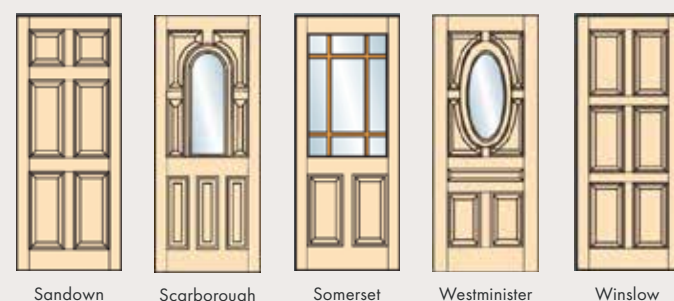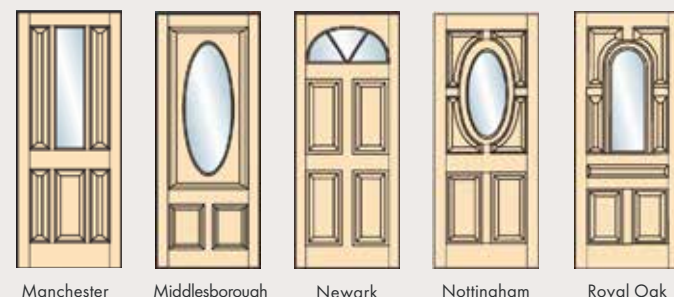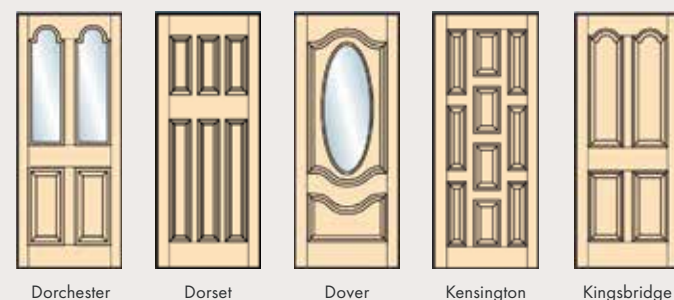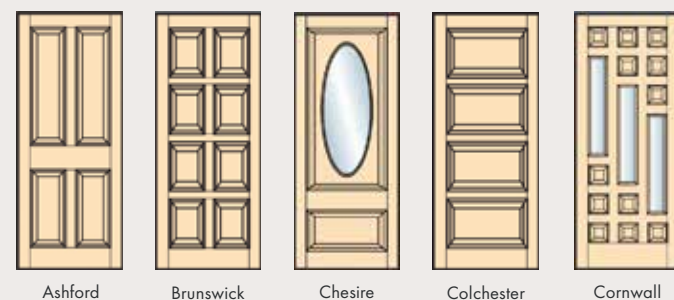

Features

- Designs can be varied on request and any panel can be substituted for glazing.
- We can prehang your door selection in a timber frame for easy installation.
- Unique 'Classical' moulding.
- Full thickness raised and fielded panels.
- Sturdy mortise and tenon glued joints.
- Doors to be glazed are beaded for 5mm glass or glazing wedge supplied for oval doors.


Available in

- Available in the Western Red Cedar, Island Kauri, Macrocarpa, and Radiata Pine.
- Other suitable timbers include American White Oak, Yellow Cedar, Kwila, Purple Heart, Pacific Rosewood.

Specifications

- 42mm nominal door thickness.
- Generous width stiles and rails.
- Glazing options are available but not included.
- Standard sizes are height by width in millimeters.
- Door size: 1980mm x 810 or 860mm.
- Sidelight size: 1980mm x 410mm.

Raised Panel Profiles

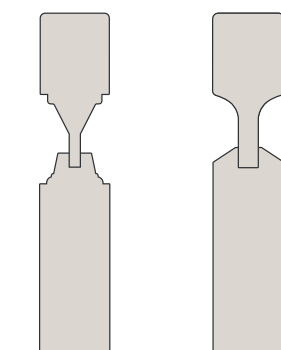



Classical Raised Panel

Scallop Raised Panel



Bungalow & Villa Doors


Bungalow and Villa style doors for that classical look to your older home. Available in interior and exterior options.

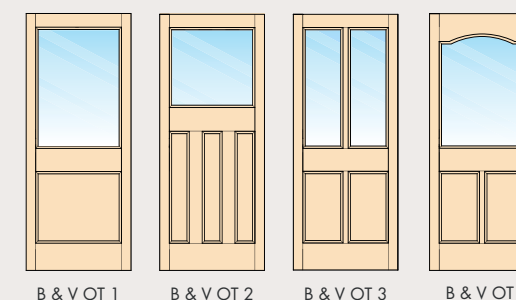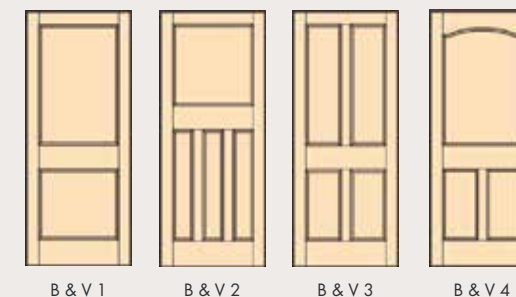

Features & Specifications


- Timber option.
- Paint quality cedar.
- H 3.2 treated pine.
- Thermowood.
- 18mm ply panels.
- Door thickness: Interior – 38mm, Exterior – 42mm.
- Custom sizes available.
- Open tops are beaded for 5mm glass standard.
- Other size glass available on request.
- We can customise these to match your existing doors.

Flat Panel Profiles




Bungalow

Villa

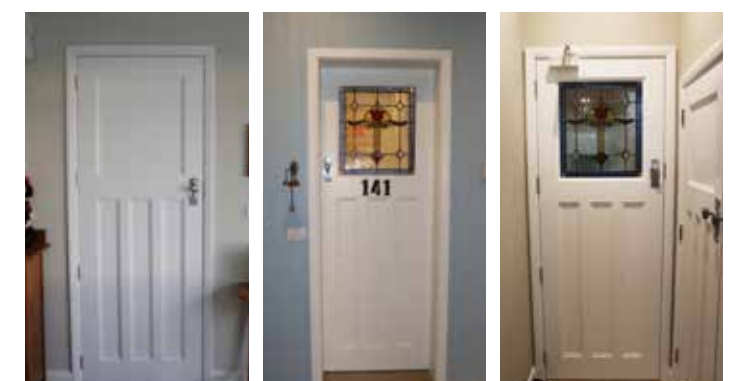

Colonial Doors

Also known as French doors these doors can be used in exterior or interior situations.

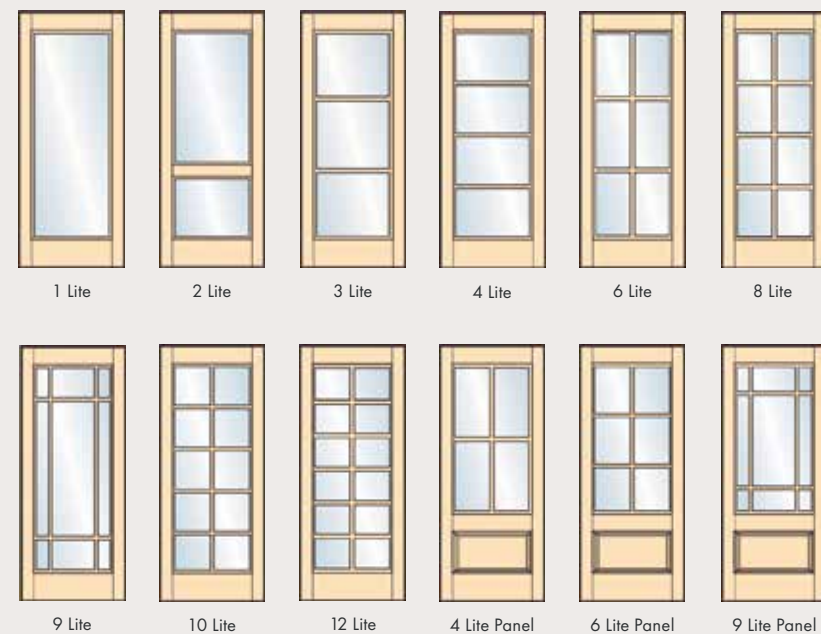

Available in

- Western Red Cedar, Macrocarpa, Island Kauri and Radiata Pine.
- Other suitable timbers include American White Oak, Yellow Cedar, Kwila, Purple Heart, Pacific Rosewood.
- Interior doors are also available in Coloured Rimu, Island Rimu, and Sapele Mahogany.

Specifications


- Glazing options are available but not included.
- Nominal door thickness: Interior – 38mm, Exterior – 42mm.
- 120mm stiles, top rail and mid rail – 180mm bottom rail.
- Standard sizes: Height x Width in millimetres.
- Standard door size: 1980mm x 610, 660, 710, 760 or 810mm.



Features


- Glazing bars are sash moulded or square beaded.
- Full thickness raised and fielded lower panels.
- Sturdy mortise and tenon glued joints.
- Beaded for glass or unbeaded for putty glazing.
- Doors can be made up to 56mm thick to accommodate double glazing.

Glazing Profiles

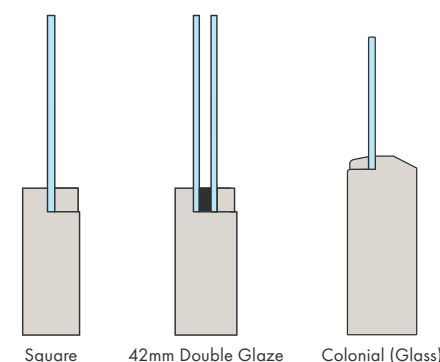


Window and Door Frames

Custom made solid timber window and door frames.

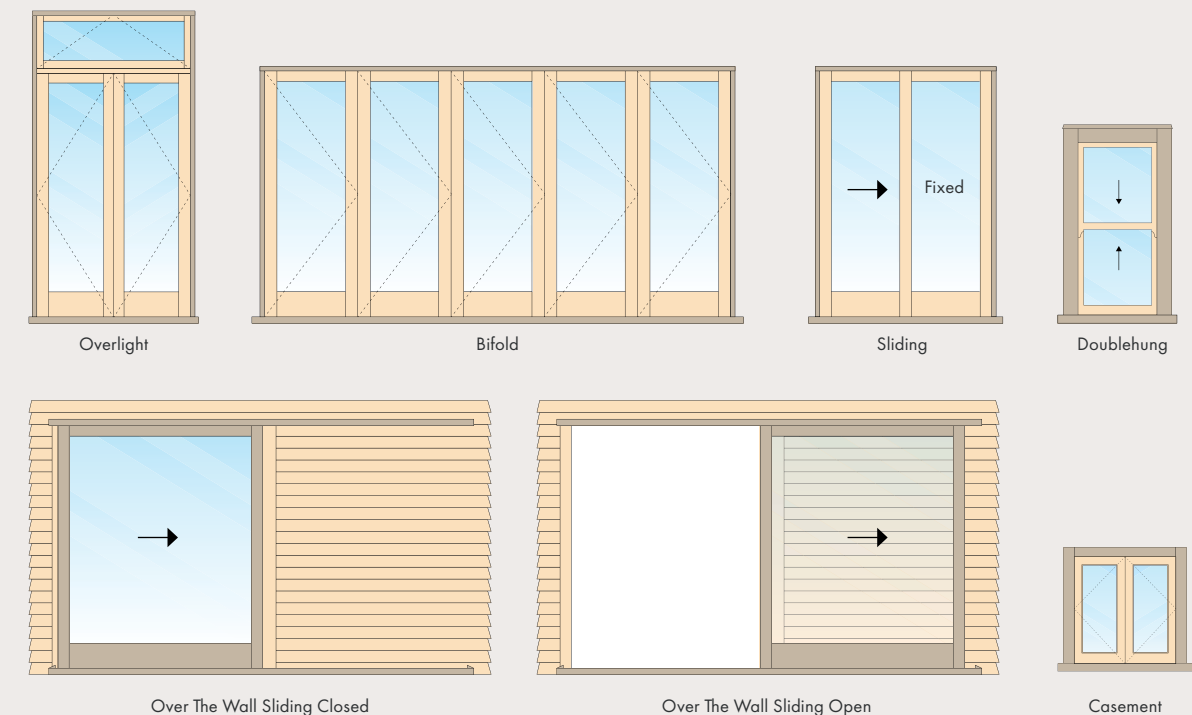

Glazing Profiles

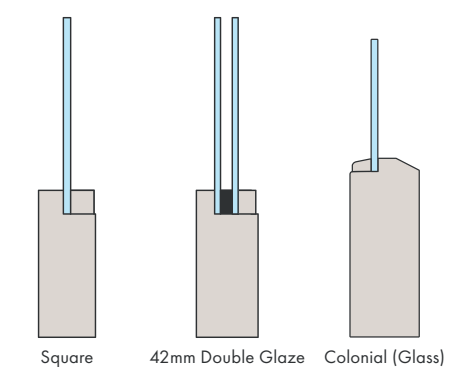

Barn Doors

Our solid timber barn doors are made to order.
An ideal door for those who want to add a rustic touch to their home.

Can be made in




- Western Red Cedar.
- Macrocarpa.
- Island Kauri.
- Radiata Pine.
- American White Oak.
- Rimu.
- Abodo Vulcan.
- Baltic Pine.

Or any other suitable timber.

We offer


- Stain quality with tongue and groove panels or paint quality with grooved MDF panels.
 - Paint quality doors have 9mm or thicker grooved MDF panels.
 - Interior stain quality doors have 12mm tongue and groove.
 - Exterior doors have 18mm tongue and groove.
- Made to suit any arrangement of hinged or sliding doors.
- Standard and over-height specifications for interior or exterior applications.
- Full custom design available, send us a picture or drawing of what you are after.

We can also supply Sliding Systems in both Exposed, Hidden Rail or for use in Cavity Sliders.

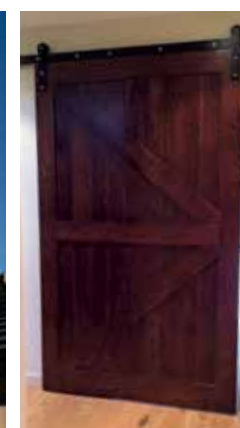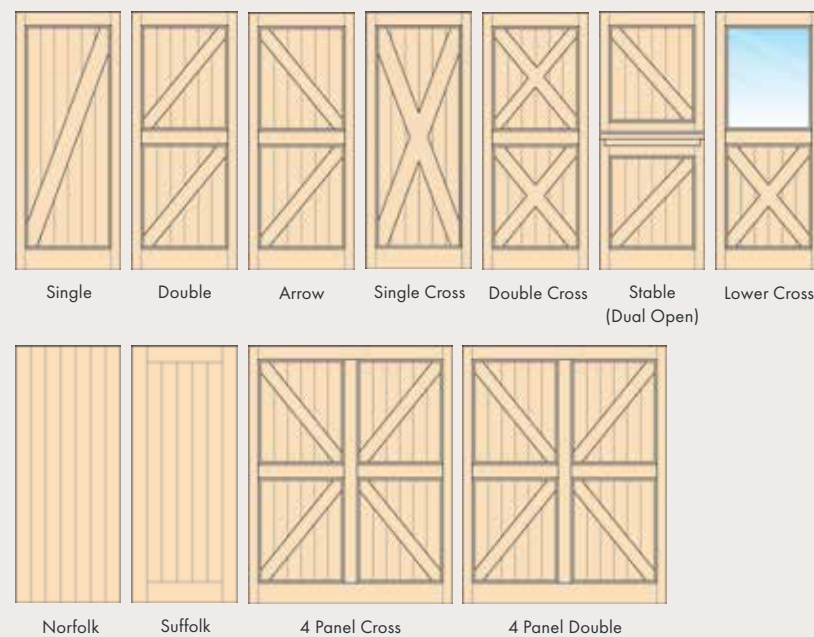


Interior Classical Doors


Solid timber range of contemporary interior doors.
Available in paint quality and in natural timber stain quality.

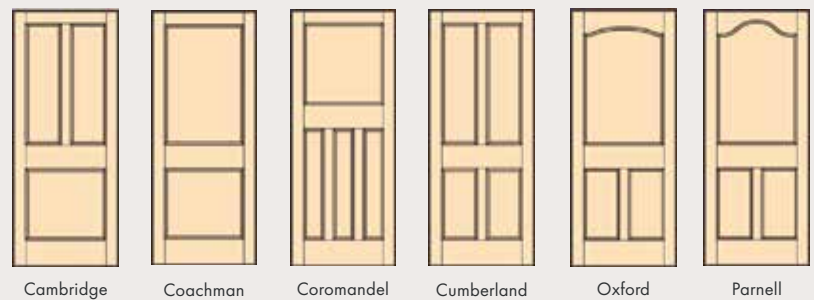

Cambridge Coachman Coromandel Cumberland Oxford Parnell

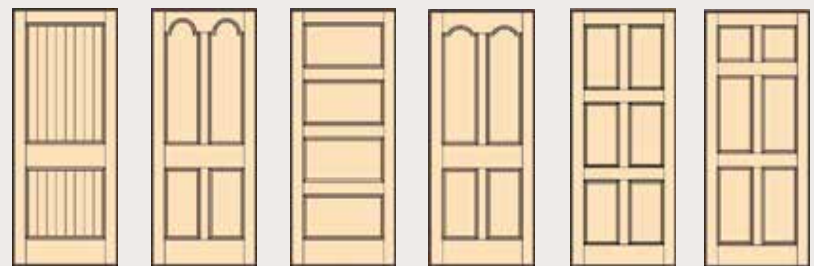


Cobham Dominican Provincial Seven Oaks Norwich Mansfield

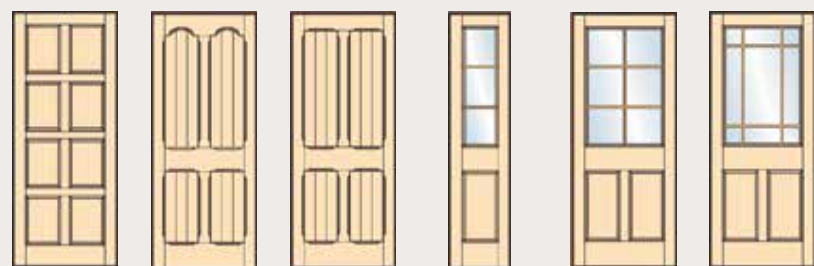

Brighton Homestead Settler Cumberland Colonial 3 Lite Cumberland Colonial 6 Lite Cumberland Colonial 9 Lite

Flat Panel Profiles

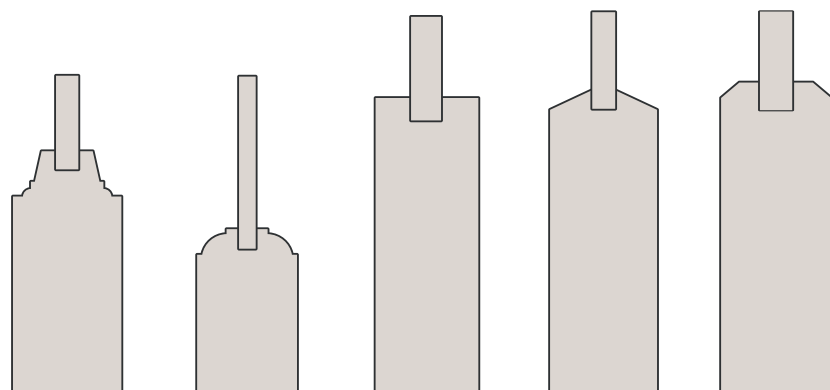

Classical Ogee Square Bevel Stop Champher

Features



- Panels are recesses and can be detailed in 5 different mouldings.
- Any panel can be opened and beaded for 5mm glass at no extra cost.
- Designs can be varied on request.

Available in

- Available in Cedar, Macrocarpa, Island Kauri, and Radiata Pine.
- Other suitable timbers include American White Oak, Yellow Cedar, Kwila, Purple Heart, Pacific Rosewood, Coloured Rimu, Island Rimu and Sapele Mahogany.

Specifications

- Glazing options are available but not included.
- 120mm stiles, 120mm top rail, 180mm mid and bottom rails.
- 38mm nominal door thickness.
- Standard sizes: Height x Width in millimeters.
 - Large: 1980mm x 610, 660, 710, 760, 810, 860mm.
 - Small: 1980mm x 305, 380, 410, 460, 510, 560mm.
- Cumberland Colonial 6 lite and 9 lite: 1980mm x 610, 660, 710, 760, 810mm.
- Cumberland Colonial 3 lite: 1980mm x 380, 410, 460mm.

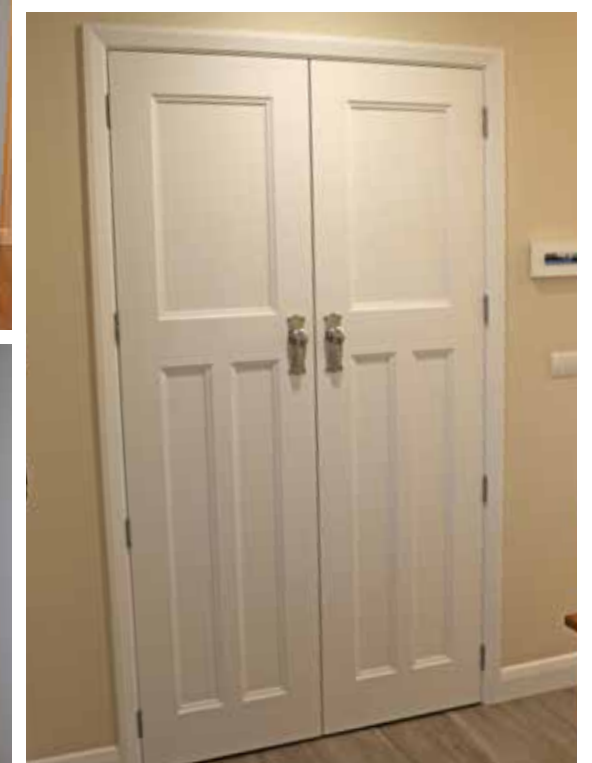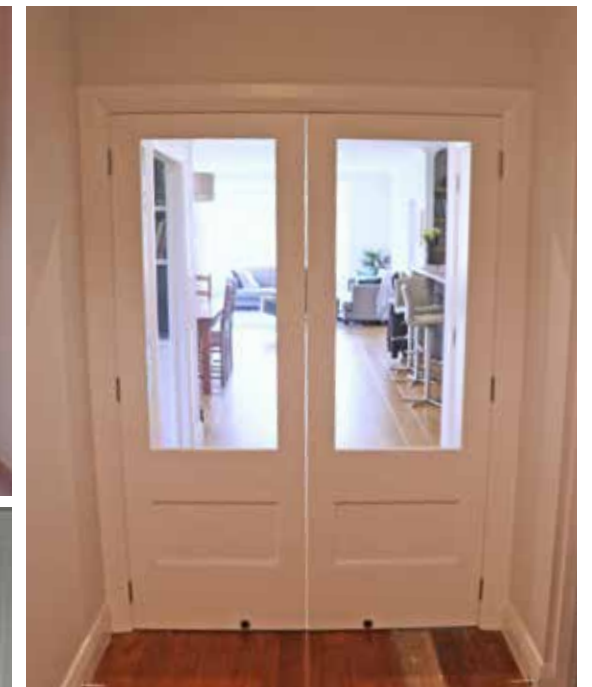

Interior Louvre Doors

Louvre doors come in various arrangements to suit any requirement you may have.

Features

- Available in Cedar, Pine or Island Rimu.
- Open Louvre: 32mm or 50mm blade.
- Closed Louvre: 28mm blade.
- Customisable exterior screens available.



Interior Shoji Doors

A unique way to divide or beautify any room in your home or business.

Features

- Shoji doors come in various heights and widths, with many colours and patterns for the screen to complete your oriental look.
- Available in Western Red Cedar.



Interior Cavity Sliders

A cavity slider hanging system allows the door to slide inside the wall cavity leaving both sides of the opening clear and unobstructed.

Features

Classical cavity sliders have proven to be reliable and durable in many residential and commercial situations including paraplegic toilets. To order, specify the door size required or the trim size available for a cavity slider. The door is priced separately from the cavity slider unit.

- Clear Pine or natural timber stain quality jambs – grooved for gib or flat for architraves.
- Strong, durable extruded aluminium and timber frame.
- Residential, light commercial or heavy duty – 120kg rating.
- Overheight or overwidth sizes made to order.
- Full range of handles and locks available.
- We use and recommend CS for Doors Cavity Sliders.

Specifications

- Available in single or double meeting configurations.
- Easy removal of doors for painting etc.
- Spring-back closing feature.
- Maximum recommended door thickness 38mm.
- Standard door sizes accommodated:
1980 high x 610, 660, 710, 760, 810, 910mm.
- Standard 90mm x 94mm framing.



FOR DOORS
The Cavity Slider Experts

Interior Prehung Doors


All our range of doors are available prehung into frames. Available in paint quality or Natural Timber Stain Quality jambs. Available in flat for architrave or grooved for gib.



Profile guide

Standard range of profiles. Custom profiles may be available on request.

Flat Panel Profiles

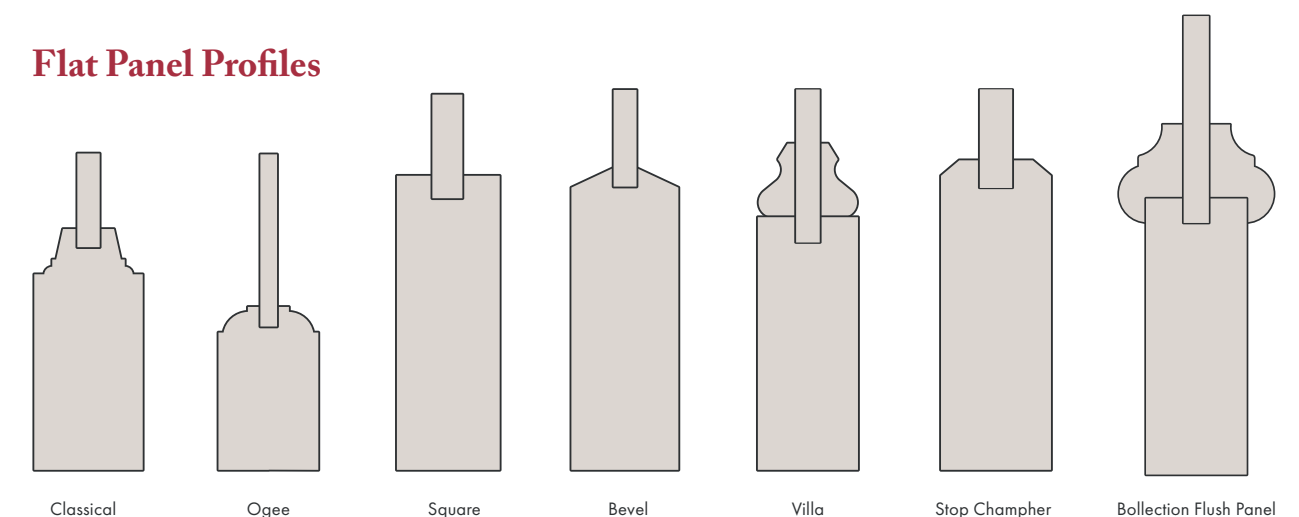


Interior Profiles

- On paint quality doors, a 9mm MDF will be used.
- On stain quality doors a 9mm Veneered MDF or 12mm tongue and grooves.
- All doors are made with mortice and tenon joints.


Exterior Profiles

- Raised and fielded Panel doors are full thickness panels, with morticed and tenon joints.
- Tongue and groove exterior doors are 18mm thick boards.
- 18mm marine ply panels used on flat panel PQ Doors.

Raised Panel Profiles

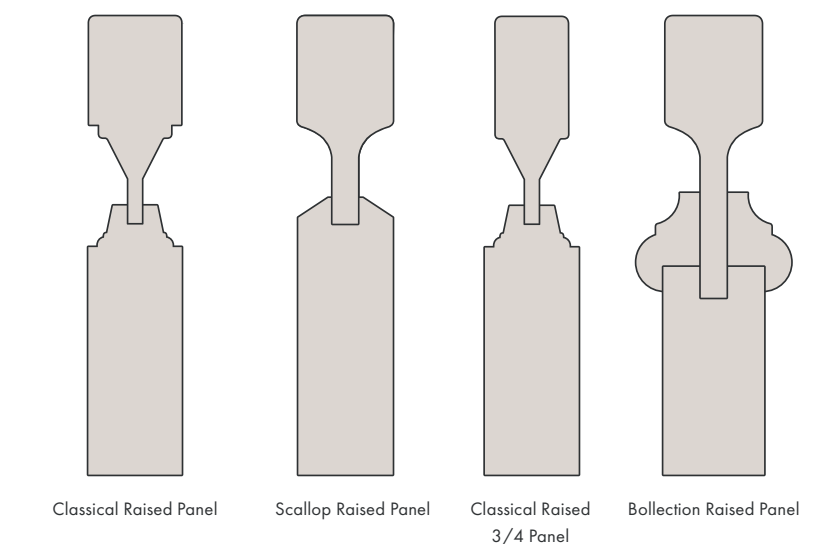

Glazing Profiles

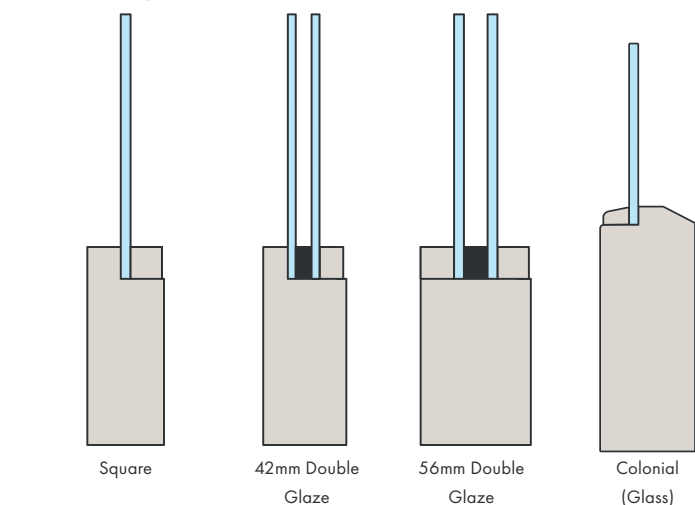



Warranty Claims

Doors must be checked carefully upon delivery for any damage or manufacturing fault. Any damage must be noted on the proof of delivery docket and reported immediately to warrant any claim against damage.

Any other claims must be made before any hanging, sizing, or cropping is done to the door.

In the unlikely event of DOOR FAILURE, Classical Doors will, at our discretion, repair or replace the door, freight paid both ways.

Classical Doors will NOT COVER ANY COSTS FOR REINSTATEMENT of a door, ie. re-glazing, re-painting, or re-hanging.

Excellence Guaranteed

Follow the care and installation instructions and finish your door in strict accordance with the sealant manufacturer's recommendations and Classical Doors will guarantee your door against defects in materials and workmanship for 5 years.

Natural colour and grain variations in timber are not considered to be defects and we make every effort to match components within the door.

Minor shrinkage and swelling of components is a normal characteristic of timber and varies with seasonal humidity. Minor warping or twisting up to 6mm can also occur normally and is not considered a defect.

We trust you will enjoy your door for many years to come.

Installation & Care

Upon delivery, place your door off the ground in a dry, well-ventilated area, away from direct sunlight and extremes of temperature or humidity.

It is vital that the door is sealed promptly after delivery to prevent moisture absorption and consequent movement.

Choose a suitable finishing system with a high UV protection rating such as marine-quality varnish or an oil-based enamel paint.

The only oil system we recommend is Sikkens as it forms a waterproof skin on the timber. Dark colours must not be used if door is exposed to any direct sunlight as this may warp or crack the door.

Refer to "BRANZ" good coating practise for further information.

Made with pride by your Registered Master Joiner – Excellence Guaranteed.

PREPARATION

Doors are machine sanded to 150 grit finish and, before applying sealant, should be thoroughly sanded with fine sandpaper (200-240 grit) to remove any handling marks and to ease sharp edges.

FINISHING

- Apply initial coats of sealant with the door laid flat, if possible.
- Apply the remaining coats after hanging the door.
- All 6 surfaces MUST be sealed and this waterproof seal must be maintained to minimise timber movement and prevent water staining.
- Recoats may be necessary every 2-5 years depending on exposure.